


The "C" Series (polystyrene Core)

Flush
(F)



Narrow with
Louver (NL)

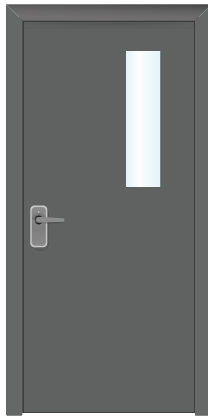

Louver
(L)



Embossed
(EM)



- | "C" Series Door are constructed with a technology of hairline seams on vertical edge are not visible on face of the door.
- | Doors are specified as "Seamless" will not have vision of seams on face and vertical edges.
- | "C" Series Doors are insulated with polystyrene Board supporting the face of the door.
- | "C" Series are insulated by polystyrene Board with density of 36KG/m³

METAL SHEET THICKNESS

Frame is constructed by a galvanized sheet comply with ASTM A653: 1995 with a thickness of:

- | 1.50 mm
- | 2.00 mm
- | 3.00 mm

Leaf is constructed by a galvanized sheet comply with ASTM A653: 1995 with a thickness of:

- | 1.25 mm
- | 1.50 mm
- | 2.00 mm

WHY "C" SERIES?



Ability for isolating heat from a place to another.



Increased energy efficiency, soundproofing and quieter operation for residential and commercial applications

USAGE OF "C" SERIES

This series is common for general use like:



Unit
Entrance



Bedrooms



Bathrooms



Closet
Doors



Stairwell

FINISH

Primer Paint "Epoxy Primer "

Powder Coated "As per the required RAL Number"