


The "H" Series (Honeycomb Doors)

Flush
(F)



Narrow with
Louver (NL)

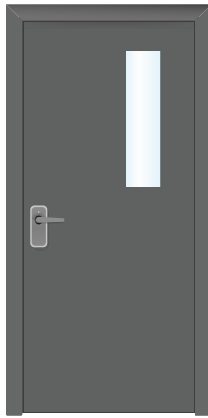

Louver
(L)



Embossed
(EM)



- | "H" Series Door are constructed with a technology of hairline seams on vertical edge are not visible on face of the door.
- | Doors are specified as "Seamless" will not have vision of seams on face and vertical edges.
- | "H" Series Doors are insulated with kraft-fiber honeycomb. Slab is securely bounded to both faces. Sheets are pressure with contact adhesive.

METAL SHEET THICKNESS

Frame is constructed by a galvanized sheet comply with ASTM A653: 1995 with a thickness of:

- | 1.50 mm
- | 2.00 mm
- | 3.00 mm

Leaf is constructed by a galvanized or Special sheet comply with ASTM A653: 1995 with a thickness of:

- | 1.25 mm
- | 1.50 mm
- | 2.00 mm

WHY "H" SERIES?



Honeycomb Core is an excellent core for all types of interior doors by virtue of their high-pressure strength.

USAGE OF "H" SERIES

This series is common for general use like:



Unit
Entrance



Bedrooms



Bathrooms



Closet
Doors



Stairwell

FIRE RATED STANDARD

Intertek: Up to 3 Hrs. with the following Standard

Standards: ASTM E152-81a, UBC 7-2 (1997), UBC 7-2 (1994), UL 10(b) (1997), CAN / ULC S104 1980 (R1985), UL 10(c) (R2001), CAN / ULC S104 (2010)

FINISH

| Primer Paint "Epoxy Primer"

| Powder Coated "As per the required RAL Number"