

ATEX



OIML



DISPENSER-EX



CDU-EX



ISO



كيان المعدات للتجارة احدى شركات الدرريس للصناعة والتجارة (اليتكو)
 Kayan Equipment Industry One of Aldrees Industry & Trading ALITCO

☎ 112500600 📠 0595263738 🌐 info@alitcoogroup.com

Appearance



RT-C 112
(1filter-1nozzle-1keyboard-2display boards)




RT-C 224
(2filters-2nozzles-2keyboards-4display boards)



RT-C 224
(2filters-2nozzles-2keyboards-4display boards)




RT-C 244
(2filters-4nozzles-4keyboards-4display boards)

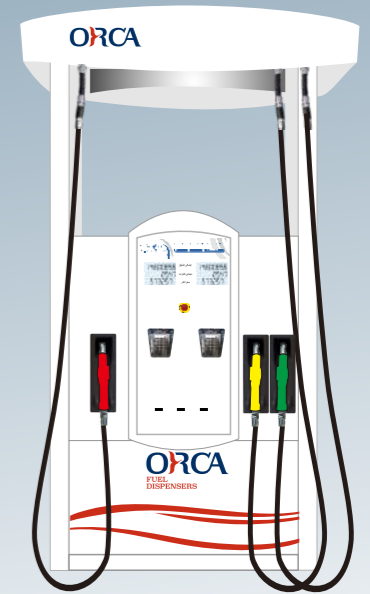

RT-C 364
(3filters-6nozzles-4keyboards-4display boards)

Option

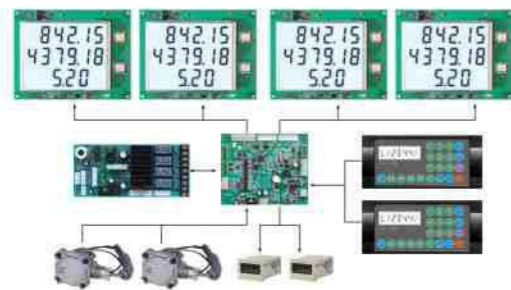

LT-B PRO 224 (2pump-2nozzle-1display-2keyboard)



Filter with flange
GLQ-01



RT-TD Automatic Nozzle is applicable for medium speed refueling service of gasoline, diesel oil and kerosene for vehicles with characteristics of easy switch-on.

Technical performance				
Product Type	Oil Inlet	Oil Outlet	Volume	Operation Pressure
RT-TD20A	NPT3/4"	15/16"	0-55L/min	0.18Mpa
RT-TD25A	NPT1"	13/16"	0-80L/MIN	0.18Mpa

ESV40A ESV40K



ESV40A, ESV40K shutoff valves is used in the place like petrol station, where it is easy to have fire accident and needs an emergent cut of f with the surrounding medium. When the valve is bumped or in the state of high temperature, and the self lock of the valve is broken, then the valve the medium resource to avoid the more danger.



Flow meter :
RT-FM4
(TATSUNO type)
Discharge rate of each revolution:0.5L
Flow range:5L~100L
Working pressure:0.12MPa-0.25MPa
Accuracy:±0.2%(5L/min-100L/min)

MSF-20N, MSF-25N



SOLENOID VALVE Technical performance		
Model	MSF-20T	MSF-25T
Medium	Gasoline, Kerosene, Diesel	
Working Pressure	0.035Mpa~0.35Mpa	
Flow Rate	3~50 L/min	90 L/min
Working Voltage	AC220V, AC110V, DC12V, DC24V	
Diameter	20mm 3/4"	25mm G1"



DTBC break away valve is installed in the pipe of sending the fuel oil. When it is pulled with force, it will divide. The two valves come back to its position, and cut off the flow of the fuel oil in order to limit the leakage of the oil and protect the machine.under the normal operation,DTBC3/4" break away valve must be installed on the pipe, which its stretchness is not less than 9", DTBC1" break away valve must be installed on the pipe, which its stretchness is not less than 12".

Technical Parameters

Size: 1110*530*2300mm (Length*Thickness*Height)

Container capacity	Number of pieces
40ft	40

Size: 1140*530*2300mm (Length*Thickness*Height)

Container capacity	Number of pieces
40ft	40

Size: 1100*730*2400mm (Length*Thickness*Height)

Container capacity	Number of pieces
40 ft	30

Size: 1300*730*2300mm (Length*Thickness*Height)

Container capacity	Number of pieces
40 ft	25

Main Technical Parameters:	
Accuracy	±0.30%
Repeating accuracy	≤0.10%
Flow range	(5-55) L/min
Maximum head	5m
Inlet vacuum	≥54kPa
Outlet vacuum	≤0.3MPa
Work pressure	< 300 kPa
Noise	≤70dB(A class)
Input hose diameter	1 1/2"
Oil hose diameter	3/4"
Motor power	0.75KW
Ambient temperature	-35°C~55°C
Humidity	≤95%
Atmospheric pressure	86kPa~106kPa
Unit Price range	0~9999(664), 0~999999(886)
Single range	1~9900.00(664), 1~999900.00(886)
Accumulative range	0~999999999.99
Power(optional)	AC110V, AC220V, AC380V/(50-60)Hz
EX Marking	Ex d ib mb IIB T3 Gb
Ex Certificate No.	CE14.5013

Additional options

Micro printer

Yes

LED player (P20)

Yes

Multimedia player 1
LCD 21.5"

Yes

Multimedia player 2
LCD 8"

Yes

IC card automation Management system

IC card refueling

Mobile APP Management system

WOW Station Mobile phone



LT-LG Controller

Advantage:

1. Program can be upgraded online for easy maintenance.
2. Can store multiple transaction records, simply modify decimal places and other operations.
3. Support Bluesky IC card, RFID and mobile APP station management system.
4. Can communicate with multi-party systems and support third-party payment systems.

FUEL STATION MANAGEMENT SYSTEM

— WENZHOU BLUESKY ENERGY TECHNOLOGY CO.,LTD —

► DEVELOPMENT | ► PRODUCTION | ► SALES | ► SERVICE

